


	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	

KRT2

VHF Communication Transceiver

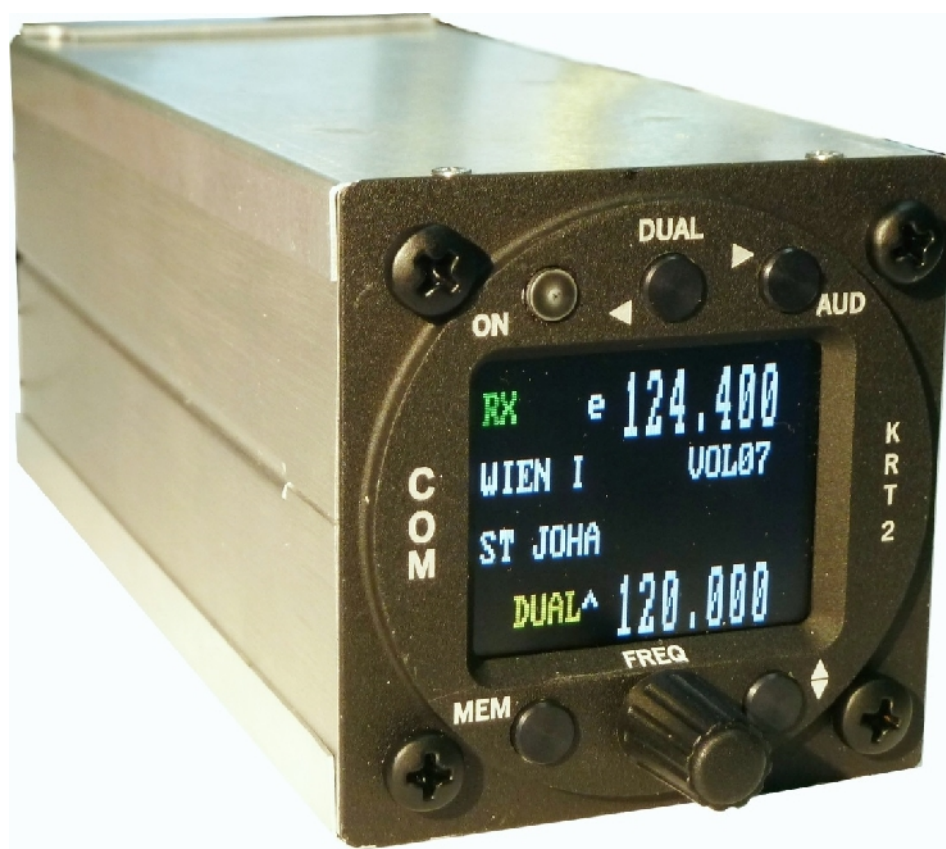

P/N 100-(0002)-(800)

Operation and Installation Manual

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

Record of Revisions

Revision	Date	Subject
1	06 Juni 2010	First issue
2	20 Sep 2010	Revision Stecker / Redaktionelle Änderungen
3	05 Feb 2011	Editorial update
4	04 Mai 2012	Cable-harness correction
5	16 Mai 2012	Software advantage for battery indication, error reports
6	19.Aug 2012	Hints for mic. Installation & intercom
7	Sept. 2012	Correction wiring
8	Dec. 2012	Dynamic Microphone GND-wiring
8.1, 8,2	Feb.2013	Text corrections
9	March 2013	Additional drawing, clarify microphone GND
9.1	March 2013	Text corrections
9.2	April 2013	Hints in drawings
9.3	Aug. 2013	Text corrections, new cable drawings
9.4	Okt. 2013	Text corrections
9.5	Nov. 2013	New favourites management
9.6	Mai 2014	Menu-limitation, PTT-Mic.-assignment, Installation limitations, Text corrections, Mic.-AUTO-enhancement
9.7	Jun 2014	Hint for speaker installation
9.8	July 2014	Add chapter 6.6.2 and 6.8.3.1, add drawing motorglider
9.9	Nov 2014	Update Installation and Limitations Section.
10.0	Dec. 2014	New Display
11.0	May 2015	Specialty of two PTT
11.1	Jun 2015	Recommendation for SIT
11.2	July 2015	6.8.3.2 Schematic correction (TX/RX)
11.3	Aug 2015	6.6.5 Supplement for speaker grounding

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

List of Service-Bulletins (SB)

Service-Bulletins have to be inserted in the manual, and entered in the table.

SB Number	Rev. No.	Date Issued	Date Inserted	Name

Unit overview

Item No.	Product Overview
	Basic Version
	Introduction of:: <ul style="list-style-type: none"> • 2 Standard Microphone Inputs • Auxiliary Audio Input • DUAL Watch Function

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	

TABLE OF CONTENTS

1	GENERAL	6
1.1	Symbols	6
1.2	Abbreviations	7
1.3	Customer Service.....	8
1.4	KRT2 Transceiver properties	8
2	Installation limitation	9
2.1	Installation	9
3	CONTROL general	10
3.1	Control Elements Overview	10
3.2	Display.....	12
3.3	Audio Menu levels	13
3.4	Self-test error reports	14
4	OPERATION	15
4.1	General.....	15
4.2	ON / OFF Switching.....	15
4.3	Frequency Selection	16
4.3.1	Direct Frequency Selection	16
4.3.2	Frequency Selection from the Favourites List	17
4.3.3	Storing and Editing Favourites.....	17
4.4	AUD – Audio Menu	20
4.4.1	VOL – Volume	20
4.4.2	SQ -- Squelch	20
4.4.3	VOX – Intercom Voice Trigger Level Setting	21
4.4.4	Manual Intercom.....	21
4.4.5	TXm – PTT Switch Selection	22
4.4.6	INT – Intercom Volume	22
4.4.7	EXT – External Audio Input Volume	22
4.4.8	DIM – Display Brightness.....	23
4.4.9	BAT – Battery test.....	23
4.4.10	SIT – Side tone	24
4.4.11	MIC – Setup	24
4.4.12	Menu lock.....	27
4.5	DUAL Watch.....	27
4.6	Transmitter Operation.....	29
4.6.1	Speciality of two PTT	30
4.6.2	Self-test monitor.....	30
4.6.3	Optical side tone.....	31
4.7	Resetting to factory settings	32
4.8	SET UP - Menu	32
4.8.1	ERASE – Erasing the Favourites List	33
4.8.2	Channel Spacing.....	33
5	Remote Control	34
6	Installation	35
6.1	Installation Hints	35

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	

6.2	Telecommunication Data.....	35
6.3	Scope of delivery	35
6.4	Unpacking and Inspecting the Equipment.....	36
6.5	Mounting	36
6.6	Electrical Connections	37
6.6.1	Microphone-Connection.....	37
6.6.2	Speaker & open microphone:.....	38
6.6.3	Earphone Connection	39
6.6.4	External Audio Input.....	39
6.6.5	Speaker Connection.....	39
6.7	Finally Audio-Setup	40
6.7.1	For gliders	40
6.7.2	For motor gliders dual seaters	40
6.7.3	For Motor planes	40
6.8	Wiring.....	42
6.8.1	Wire Gauges	42
6.8.2	Connector Pin-Configuration	42
6.8.3	Wiring Diagram.....	43
6.8.3.1	Two place motor aircraft connection	43
6.8.3.2	Glider two place connection	44
6.8.3.3	Glider single.....	46
6.8.3.4	Motor glider single.....	47
6.8.3.5	Motor glider dual	48
6.8.4	Wiring for dynamic microphones	50
6.8.5	Connection support	50
6.9	Antenna.....	51
6.9.1	Antenna Selection	51
6.9.2	Installation Recommendation.....	51
6.10	Microphone general	52
6.11	Post-Installation Check	53
6.12	Starting Up.....	54
6.13	Accessories	54
6.14	Drawings	55
6.14.1	Dimensions.....	55
6.14.2	Installation Directions	56
7	Maintenance.....	57
7.1	Periodic Maintenance	57
7.2	Repair	57
7.3	Cleaning.....	57
8	ANNEX.....	58
8.1	Frequency / Channel- schedule	58
8.2	Technical Data.....	59

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

1 GENERAL

This manual contains information about the physical, mechanical and electrical properties as well as a description for the operation and installation of the VHF airborne transceiver KRT2.

1.1 Symbols



WARNING

Non-compliance may cause personnel injury due to radiation or fire.



CAUTION

Non-compliance may cause damage or incorrect operation of the transceiver.



INFORMATION

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	

1.2 Abbreviations


Abb	Description	Definition
PTT	Push to Talk	Transmitter activation
VOX	Voice operated intercom	Voice level setting for intercom activation
INT	Intercom level	Intercom volume level setting
SQ	Squelch	Squelch setting
DIM	Dimming	Display brightness setting
BAT	Battery control	Check DC source
EXT	External audio input	External Audio input level setting

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

1.3 Customer Service


In order to process returned units most expeditiously, please fill in the form Reshipment to be found under Service at <http://www.dittel-avionik.de>.

	Suggestions which will improve this manual are very much appreciated at: http://www.dittel-avionik.de .
---	--

	Information concerning software updates are available under AIRplus Avionics at http://www.dittel-avionik.de .
--	---

1.4 KRT2 Transceiver properties

- VHF airborne transceiver
- Frequency range 118,000 to 136,975 MHz
- Channel spacing 8,33/25 kHz (2278 channel)
- Fast channel selection
- 4 separate microphone inputs (2 x standard or 2 x dynamics)
- Audio-input for other audio devices
- Installation: Standard panel cut-out (57 mm)
- 100 user definable frequencies with up to 8 character designators

	Continuous transmissions will be turned off after 2 minutes. (Stuck mic function)
---	--

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

2 Installation limitation

The conditions and tests required for (E)TSO approval of this article are minimum performance standards. It is the responsibility of those installing this article either on or within a specific type or class of aircraft to determine that the aircraft installation conditions are within the (E)TSO standards. (E)TSO articles must have separate approval for installation in aircraft. The article may be installed only if the installation is performed in accordance with Part 43 or the applicable airworthiness requirements.


2.1 Installation



For installation hints, data, electrical connections and mounting instructions please see section “6 Installation”.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	



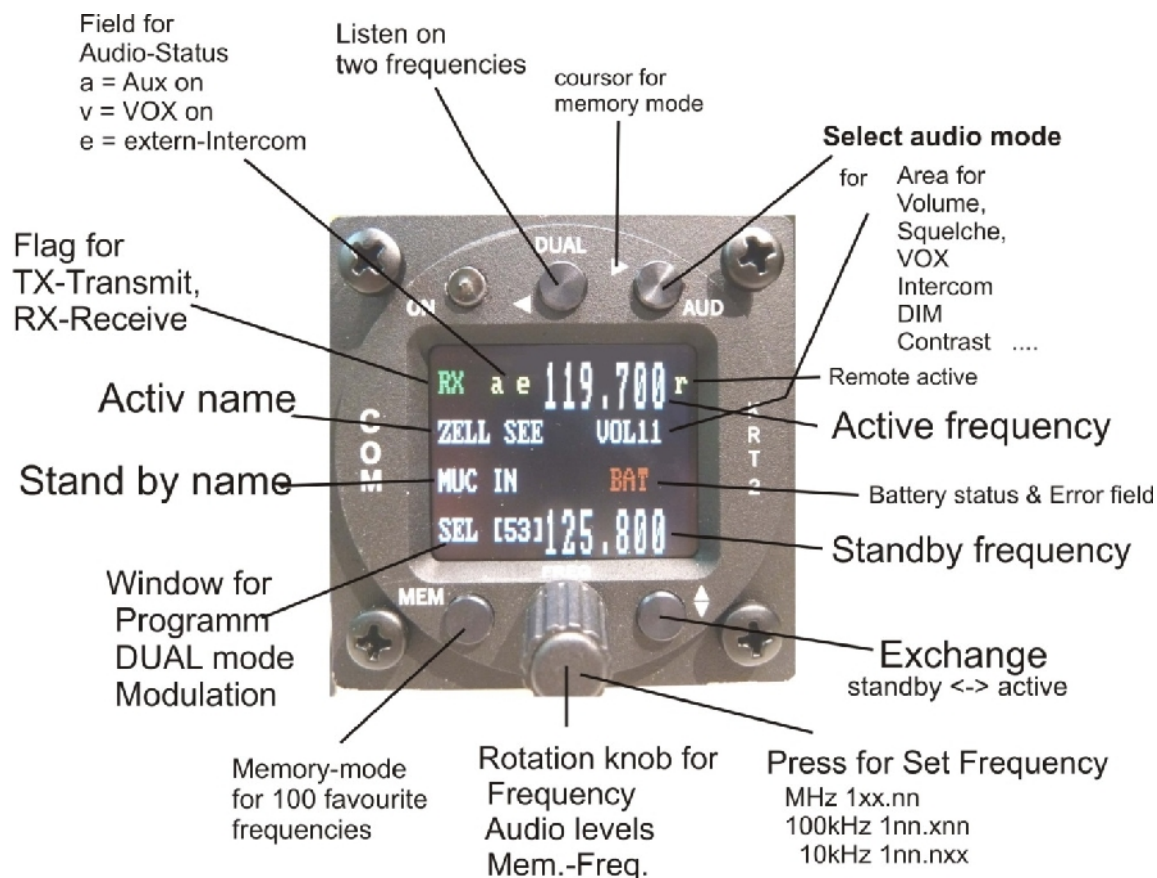

3 CONTROL general

3.1 Control Elements Overview



	ON / OFF	Self-locking switch
	DUAL WATCH	1. Scanning between the Active and Standby frequencies 2. Positioning cursor to the left when programming the station designator

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	

	AUDIO SELECT	<ol style="list-style-type: none"> 1. Stepping through the audio menus VOL SQ VOX TX INT EXT DIM CON SIT and MIC 2. Positioning cursor to the right when programming the station designator
	FAVOURITES	<ol style="list-style-type: none"> 1. Frequency and designator selection from the favourites list 2. Programming of favourites (frequency and designator)
	EXCHANGE	Exchange of the Active and Standby frequencies
	TURNING KNOB	<p>Pressing for Selection of the frequency range to: MHz, 100kHz, 10kHz Toggles between frequency and designator when programming the favourites</p> <p>Sets all variable values in any menu</p> <ol style="list-style-type: none"> 1. Volume setting of headsets and speakers 2. MHz/kHz selection of the standby frequency in 3 different ranges 3. Favourite selection 4. Alpha character selection when programming favourites 5. Change of microphone settings

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

3.2 Display

Indication	Meaning	Remarks
RX	Reception	RX is displayed during reception with a squelch value of 02 or more
TX	Transmission	Transmitter operates normally
Te	Transmitter was turned off automatically after 2 min continuous operation	
119.700	Active frequency	
ZELL SEE	Active frequency station designator	Displayed when frequency and designator is stored in the favourite list
VOL	Receiver volume level (default after a certain time delay)	When AUD was pressed the corresponding Audio Menu item and setting is displayed
DUAL	Active frequency AND Standby Frequency are monitored simultaneously	DUAL function is deactivated by frequency change or by pressing the DUAL button again
MEM	Favourite list index (0-99)	When frequency and designator are stored at this index they are displayed
119.700 upper	Active - frequency	
125.800 lower	Standby/Dual - frequency	
<	The pointer indicates what the turning knob will change VOL SQ VOX.....etc Standby frequency	Arrow is positioned in correspondence to the button pressed (AUD or FREQ)
BAT	Supply voltage is low <10,5V	Battery low or Battery/Generator faulty

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

A-match	Antenna error	Bad antenna match
a v e	Status of certain Audio menu functions	a = AUX. Input active v = VOX active e = external Intercom switch active
MUC IN	Standby frequency station designator	Displayed when frequency and designator is stored in the favourite list

3.3 Audio Menu levels

Displayed	Signification	Remarks
VOL	Volume	Default level
SQ	Squelch	
VOX	Voice operated intercom	
DIM	Display brightness	
BAT	DC source check	
INT	Intercom - Volume	
EXT	Volume of external devices	
TX**	PTT button selection	Left/Right/Both
SIT	Side tone	During transmitter operation
MIC	SetUp-Menu for Mikrophones	Service-Menu ohne Funkbetrieb.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

3.4 Self-test error reports

Display	Meaning	Remark
Er_PLL	Internal error, no transmission	Return the transceiver for maintenance
Er_ADC	Internal error,	Return the transceiver for maintenance
Er_FPA	Internal error; unit not usable	Return the transceiver for maintenance
Er_I2C	Internal error; unit not usable	Return the transceiver for maintenance
Er_si53	Internal error; unit not usable	Return the transceiver for maintenance
Er_D10	Internal error; reception corrupt	Return the transceiver for maintenance
Key_Block	Internal error; unit not usable	Return the transceiver for maintenance

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

4 OPERATION

4.1 General

In the normal operating mode in which the turning knob always is connected to the volume (VOL). The normal operating mode can be left by pressing the AUD, FREQ or MEMORY button.

When not in the normal mode and there is no pilot action for more than 10 seconds the unit returns to the normal mode.

4.2 ON / OFF Switching

ON / OFF switching is by the self-locking push switch.

After power up the following display will be displayed:



Device-name
KRT2

Software-
Version e.g. V8.2

(example)

The unit then starts in the normal operating mode using and displaying the data last used.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	

4.3 Frequency Selection

There are two different frequency selection methods:

- Direct Input
- Selection from the favourite list (index 0-99)

4.3.1 Direct Frequency Selection



The Standby-Frequency is set with the turning knob in 3 different ranges. The selected range is highlighted and can be changed with the FREQ button.



Frequency ranges are:

1xx.nnn

1nn.xnn

1nn.nxx

Press the FREQ button once or several times until the desired frequency range is highlighted.



When the pointer is not next to the Standby Frequency window, it will be repositioned with the first pressing of the FREQ button.




Exchanges the Active and Standby frequencies.

When the Exchange button was not pressed, the Standby frequency display will return to its normal appearance after 20 seconds.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

4.3.2 Frequency Selection from the Favourites List

By pressing  and operating the turning knob a specific favourite list position can be accessed [xx] (xx = index 0 ... 99). When frequency and station designator have been defined, they will be displayed in the Standby and station designator windows.

The favourite list designators can be sorted in alphabetic order (see 4.3.3 Storing and Editing Favourites).




Exchanges the Active and Standby frequencies.

The selection procedure can be terminated with either the AUD or FREQ buttons. Without pressing any of these buttons the unit will return to its normal operating mode after 20 seconds.

4.3.3 Storing and Editing Favourites

Any displayed Standby Frequency can be given a designator and both can be stored together as favourites in the favourite list. Both the frequency and designator of a favourite can be edited.



First press  button and by means of the turning knob go to the desired favourite list position which may be empty or the favourite to be edited (index [00 ...99]).

Press the MEMORY button a second time and „–EDIT–“, will show up in the program window.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015



In the designator window a blinking cursor will show up under the extreme left character.

The turning knob selects the desired character.

The AUD button positions the cursor one character to the right. The DUAL button positions the cursor one character to the left and simultaneously erases this character.


The station designator can consist of maximum 8 characters.

To change frequency just press the FREQ button and follow the normal direct input procedure to edit the frequency.

To quite the frequency input press the MEMORY button again in order to go to the station designator window for editing the designator if required. Using the buttons FREQ and MEMORY it can be toggled any time between designator and frequency input.


Keep in mind the watch dog timer which will terminate the input mode after 20 sec.

Termination / save

From the designator mode only terminate just by pressing , for short time it appears "SAVE" and the system goes back into favourite selection.

A **sorting process** can be activated by pressing again MEMORY from EDIT-mode.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

SORT? will show up which stays for 20 seconds and it should be activated by  or skipped by MEMORY.

When activated all 99 favourites will sorted in alphabetical order which can take several minutes.

During the sort procedure „RUN nn“ is displayed in the program window, with nn being the running index.

After skip or end of sort the transceiver then resumes the normal operating mode.

When the MEMORY button is pressed during the time when „RUN nn“ is displayed the sorting procedure is terminated. The favourite list then is sorted partially only and the transceiver resumes the normal operating mode.

Example:

1.) Button MEM -> SEL [23] = Select location


2.) Button MEM -> -EDIT- = Input of name


Rotation knop to select character

For cursor use (AUD) (DUAL)

Frequency setting -> press knop

Use button MEM to go back to -EDIT-

3.) Button  -> shortly SAVE -> back to 1.) (do nothing = cancelling)

4.) Button MEM -> question for SORT Yes = , No = MEM or do nothing.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	

4.4 AUD – Audio Menu



Any action in the Audio Menu requires the pointer (<) to be next to the Audio menu window (see picture). When the pointer is next to the Standby frequency window, the pointer can be repositioned by pressing the AUD button once.

VOLnn is the Audio menu default display. No action on any control for more than 10 seconds will result in the VOLnn display.

Audio Menu items can be accessed in the following order by repeatedly pressing the AUD button.

VOL (default) SQ VOX TXm** INT EXT DIM SIT MIC

Audio menu items to right of the above list are less used than the left ones.

4.4.1 VOL – Volume

Turning the turning knob changes the receiver volume.

VOLnn Range: 01 – 16



The VOL setting only concerns the receiver and not the intercom system. Intercom volume values are set in the INT audio menu.


4.4.2 SQ -- Squelch

Pressing the AUD button once enables the turning knob to change the squelch level values.

SQnn Value range: 01 – 10

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

The Squelch setting is depending on several factors.
For engine driven airplanes an initial setting of 05-08 is recommended.
Gliders may need a lower setting. The lower the Squelch level value the higher is the input sensitivity. A high sensitivity setting is susceptible to noise from other sources like ignition strobe-lights etc.

	Standard SQ-level is 05 ... 08. Higher setting will suppress weaker input signals. 01 = Squelch off, 02 = for long range. Squelch does not influence the intercom system.
---	---

4.4.3 VOX – Intercom Voice Trigger Level Setting

Pressing the AUD button twice enables the turning knob to change the voice level which triggers the intercom.

The intercom voice trigger level must be set to such a value which prevents that normal cockpit noise being heard in the earphones. The intercom system should only be activated when talking at a normal voice level into the microphone.

The higher the trigger level the louder the voice must be in order to trigger the intercom system.

VOX on condition is indicated by flag “v”.

VOXnn Range: 01 – 10

In gliders with active speaker use VOX=10 only.

4.4.4 Manual Intercom

In case of extreme cockpit noise or uncompensated microphones the Intercom can be controlled manually by using an external switch.

Therefore the VOX system must be activated permanently by selecting VOX: 01.

To turn off the Intercom the talk switch (default closed) must be opened, which will be indicated by “e”.

The manual Intercom turnoff only works by a deactivated external audio input (see 4.4.7).

For use in gliders the VOX has to be set to 10 for disabling the speaker control.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

4.4.5 TXm – PTT Switch Selection

Pressing the AUD button three times enables the turning knob to enable certain PTT switches.

On transmission only that microphone will be enabled which is related to the PTT-L/R. The equivalent indication is TX or TX1 / TX2.

On transmission only the PTT-L/R related microphone will be activated.

TXm** *- Left / -* Right / ** Both

4.4.6 INT – Intercom Volume

Pressing the AUD button four times enables the turning knob to set the intercom volume.

INTnn Range: 01 – 10

4.4.7 EXT – External Audio Input Volume

Pressing the AUD button five times enables the turning knob to set the external audio input volume. External audio inputs can be audio alarms, voice alarms, Vario, etc. Required level is 200mVpp (6Vpp max).

Activation occurs for settings >00 and will be indicated by the flag “a”.

00 = turning off,

01 lowest level without threshold, 9 = highest gain.

EXTnn Range: 00 - 10


	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	

4.4.8 DIM – Display Brightness

Pressing the AUD button six times enables the turning knob to set the display brightness.

Display lighting current drain at maximum brightness is only 10mA. Maximum brightness is glare free even in darkness and can be used continuously.

DIMnn Range: 01 – 16

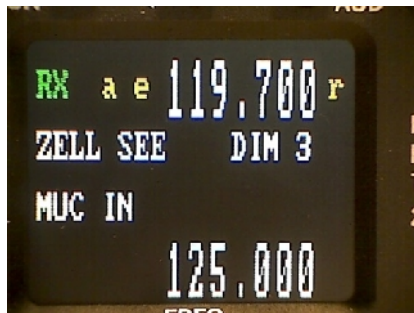

4.4.9 BAT – Battery test

Pressing the AUD button seven times enables the turning knob to display the battery voltage.



	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

4.4.10 SIT – Side tone

Pressing the AUD button eight times enables the turning knob to set the side tone volume. (for gliders should be set to 01)

SITnn Range: 0 – 9

4.4.11 MIC – Setup

This mode is for microphone setup and test only without using the PTT. It is not for normal operation.

Each of the two microphone input channels can be configured individually, which enables different microphone types to be used.

A maximum of two microphones of same type may be connected to each microphone input channel (see chapter 6.6.1 Microphone-Connection).

The MIC – Setup is the last item of the Audio menu and can be accessed by pressing the AUD button nine times.



By pressing the DUAL button repeatedly L, R and AUTO can be selected. L (R) means left (right) microphone input channel. The AUTO function is explained later.

By means of the turning knob the displayed microphone input channel amplifier gain (MIC-level-01==low-gain,-09==high-gain) can be selected

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

individually. The microphone signal level is dynamically displayed as bar and as numeric value (from-0.00-to-1.00) in the line below.

The initial MIC-level should be 05, the engine should be running, use a headset or earphone and speak at a normal voice level to fine-tune the MIC-level. Whenever a new MIC-level is selected, the dynamic bar indicator should then be at about 50%.

Special hint: At activation of MIC-Setup the present condition of speaker switch will remain (SQU on/off). At speaker use a feet back can become active.

When the microphone setup menu is terminated, the new value is stored. To activate AUTO the menu should be terminated with this selection, else leave in L or R position.

The range of the MIC-level for standard microphones is 01 to 09.

MIC levels 10 and 11 are special settings for low microphone levels like dynamic micro-phones often used in gliders.

Those levels are valid for the left (L) input only.

10 is used for non-amplified Electret microphones with a 8 volt supply voltage.

11 is for dynamic microphones only.

For high gain selection (> 9) the use of side tone can lead to a feed back at transmission. In that case it should be set to SIT01.

In the AUTO mode (up to Firmware version 6.16 every 30 sec. then at transmission start) the left microphone impedance is measured. When using an Electret microphone but a dynamic microphone is recognized, internal switchover to the dynamic microphone type and vice versa will take place. When using a dynamic microphone and an Electret microphone is recognized, internal switchover to the Electret microphone type will take place.

For the dynamic microphone the gain value 11 will be set for L.

If Electret is recognized the presented values will be set.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015



The present recognized type will be updated (Mic: dyn/std) only if the mic.-setup is re-entered.

For the std-part the previous individual setup is stored when the menu was leaving.

The MIC submenu is terminated by pressing the AUD button.

Additional indications

Additional indications for test purposes:


RxS : RF receiver input level (from Automatic Gain Control)

Ext : External audio input voltage

Mic : dyn or Mic: std

Display indicates, which microphone type has been selected after entering the mic.-menu.

After firmware 6.17 or 7.02:

This Symbol  appears on right side of STBY-Frequency in AUTO-mode if the dynamic microphone has been recognized and activated after transmission.

To reactivate the intercom a short press of the PTT is required.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

4.4.12 Menu lock

For school operation the menus area TXm to MIC-setup can be locked. To lock or unlock the button combination AUD & FREQ has to be pressed simultaneously for > 2 seconds.

In lock condition there will be displayed a "L" at the right end of the third line.

To store those condition the setting of SQnn should be changed before turning off.

VOL	SQ	VOX	<i>TXm</i>	<i>INT</i>	<i>EXT</i>	<i>DIM</i>	<i>CON</i>	<i>SIT</i>	<i>MIC</i>
Available			<i>Locked and not available</i>						


4.5 DUAL Watch

Because the communication transceiver KRT2 contains only one receiver, DUAL watch is achieved by alternating between the Active and Standby frequencies.

The DUAL button activates and deactivates the dual watch function. Deactivation also can take place by pressing either the FREQ or MEMORY buttons.

The frequencies to be watched should be selected prior to the DUAL watch selection.

Scanning of frequencies is only possible when differentiating between radio noise and radio transmissions. This can be achieved with the squelch system set to a value of 02 or higher.

	There must be radio noise suppression in order to recognize reception. SQ must be 02 or higher.
---	---

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

When DUAL watch is activated, “DUAL” is displayed on the lowest line. The pointer next to the DUAL display indicates the frequency on which there is reception.

The Active frequency always has priority, so the receiver remains on the Active frequency as long as there is reception on the Active frequency. When there is no reception on both the Active frequency and the Standby frequency the receiver scans both frequencies 5 times per second.

When there is reception on the Standby frequency the receiver stays on the Standby frequency, however it switches to the Active frequency every 2 seconds for 0.3 seconds. When reception is detected on the Active frequency the receiver stays on the Active frequency.

The pointer next to the DUAL display indicates on which frequency there is reception.



Active-frequency-reception



Standby-frequency-reception

Standby and Active frequencies can be exchanged when in the DUAL mode. The transmitter operates on the Active frequency only.

Summary:

- Select the Standby frequency to be monitored in addition to in use frequency.
- With the AUD button and turning knob set SQnn to 02 or higher.
- With the DUAL button activate the DUAL watch function.
- When there is no reception on both the Active frequency and the Standby frequency the receiver scans both frequencies 5 times per second.
- When scanning the Active frequency always has priority.
- Deactivate the DUAL watch function with the DUAL or FREQ or MEMORY buttons.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	

4.6 Transmitter Operation

The unit transmits on the active frequency (upper line) as long as a PTT (press to talk) switch is pressed.



Transmission



Reception

„TX“ indicates normal transmitter operation.

„RX“ indicates a receiver operation.

In the lower left corner of the display the carrier modulation is dynamically displayed. It corresponds to the side tone which is not available on gliders when no earphones are in use.

In order to avoid the blocking of the frequency by unintentional long transmissions (stuck microphone) the transmitter is switched off after two minutes and the display changes from „TX“ to „Te“. To resume transmission the PPT switch first must be released and then be pressed again.

While transmitting the external audio input will be turned off automatically. The microphone selection is dependent upon the pre-setting of the TXm-activation.

The differential speaker output will be turned off to prevent an audio feedback to the microphone. The speaker also will be disabled if the intercom (VOX) is active.

The output for the headset will carry the side tone.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

In case there is just one PTT button available and multiple headsets in use both the PTT-L and PTT-R should be tied together, see also “4.4.5 TXm – PTT Switch Selection”.

4.6.1 Speciality of two PTT

There are two different PTT assigned for each of the left and right side microphones. This enables the deactivation of the not used one preventing additional noise and unintentional talking on transmission.

In case there is just one PTT possible both the PTT-L and PTT-R must be tied together, see chapter 4.4.5.

4.6.2 Self-test monitor

Operating in the background continuously there is a back ground test system.

The field for battery status & error (see Control Elements Overview) is used to indicate warnings and in the case of hardware failure, different error reports be displayed there.

The warnings are:

BAT Low battery voltage (becomes active < 10,5V)

At transmission

A-match Bad antenna match or antenna defective.

Also while transmitting the TX-flag (left top) will change to:

Te If transmission time has exceed (> 2 minutes)

All other reports starting with Er.... Indicating a major hardware failure and consequently the radio has to be returned to the factory.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

4.6.3 Optical side tone

Especially when used in gliders, where headsets are generally not worn and thus no side tone is heard, it is very helpful to see if the microphone is working. The KRT 2 solves this problem.

At left lower side, there is a modulation indicator that depicts the voice level. When there is no modulation it becomes a small dot approximately in the centre.

Also if it far off centre, it indicates that there is bad antenna matching.



	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	

4.7 Resetting to factory settings

Returning to the factory settings can only be initiated during power-up.

To do this, during power-up the MEMORY and DUAL buttons must be pressed simultaneously and the display will show "SET DEFAULTS". When the buttons are released the resetting to the factory settings takes place. When resetting is completed "DONE" is displayed.

Resetting to the factory settings will not change any data in the favourite list memory.

4.8 SET UP - Menu


During power-up the MEMORY buttons must be pressed.

It appears "protect mode", just wait until it changes.

There are two functions within the Set-up menu:

- ERASE – Erasing of the favourites (frequency and designator)
- Channel Spacing – 25kHz / 8,33kHz

Programming of the Set-up is done with the lower 3 buttons next to the symbols (Exit, S, E). Their function is described on the display.

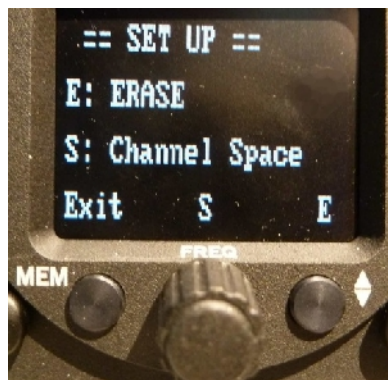


Set-up program exit is with the MEMORY button. The unit remains powered and the normal operating mode is resumed.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

4.8.1 ERASE – Erasing the Favourites List

When in the SET UP – Menu select the “ERASE” sub-menu with the buttons next to the symbols (Exit, Y) .

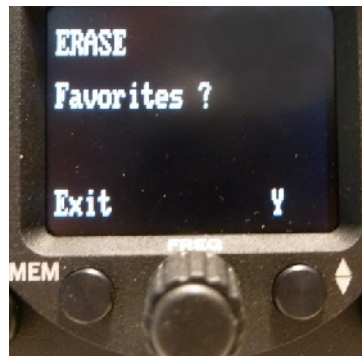

Erasing the favourites (frequency and designator) starts after the button was pressed again. This procedure may last a few minutes during which time “ERASING” is displayed.

All INFO frequencies and designators that were stored on delivery are lost and all favourite index positions (01 to 99) are available to the user.

4.8.2 Channel Spacing

When in the SET UP – Menu pressing the FREQ (S) button will change the KRT2 into the Channel Space submenu.



The desired channel spacing then can be selected and the (X) then indicates the actual channel spacing.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

5 Remote Control

Tandem-seat airplanes can be equipped with the KRT2RC Remote Control Unit. The remote control unit is connected to RS232 serial interface and enables selection of the most common settings like frequency, volume, squelch, VOX, display settings. In addition the unit has an independent memory for favourites (frequency and designator).

Transmission error messages are displayed in the error window in the third line:

- R_Time = Time-out transmission error
- R_ChkS = Checksum error
- R_Cmd = Unknown command
- R_Char = Data error
- R_Freq = Wrong Frequency

The error message disappears when a valid command or a new frequency has been input, latest however after 5 seconds.

Remote control unit errors do not interfere with the KRT2 transceiver operation.

Data transmission between the transceiver KRT2 and the remote control unit (KRT2-RC) is checked once every minute. A “r” in the upper right corner is displayed when there is no malfunction.

The KRT2-RC can also operate the KRT2 in a fully stand-alone mode such the KRT2 can be installed anywhere in the aircraft and be operated remotely by the KRT2C. This feature will be useful in tandem aircraft, or aircrafts with very little space behind the instrument panel.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

6 Installation

6.1 Installation Hints

The following hints should be considered for installation.

A certified maintenance shop should perform the wiring (or as required by local national regulations). For the wiring diagram refer to chapter “6.8 Wiring”.

6.2 Telecommunication Data

The following data may be required for the radio station licence.

Manufacturer	AIRplus Maintenance GmbH
Type	KRT2
EASA Number	P/N 100-90001-00
Power Output	6 W
Frequency:	118,000 – 136,975 MHz
Emission Designator:	6k00A3E für 25kHz channel spacing 5k00A3E für 8,33kHz channel spacing


6.3 Scope of delivery

Part Number	Description
KRT2	KRT2 - VHF Transceiver
ZUB2 (4 pcs)	Mounting screw KRT2 - for panels up to 3mm
	Operation and Installation Manual
	EASA Form 1

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

6.4 Unpacking and Inspecting the Equipment

Carefully unpack the equipment. Damages due to transportation must immediately be reported to the shipping company. Save the shipping container and all packing material to substantiate your claim.

	For storage or reshipment the original packing material should be used.
---	---


6.5 Mounting

- In cooperation with the maintenance shop, mounting details are specified. The maintenance shop can manufacture and install all cables that may be required.
- Avoid installing the unit in the vicinity of heat sources. Sufficient air-circulation is required.
- There must be sufficient space for cables and connectors.
- Avoid sharp bends and wiring close to control cables.
- Cable length must be such that connectors are accessible for repair.
- The wiring to the transceiver must be installed such that water droplets formed by condensation will not run into the connector.
- Remove the turning knob in order to install the transceiver:
 - Remove the turning knob cap with an appropriate tool.
 - Loosen the screw and remove the turning knob.
 - Install cap correctly oriented!
- Installation is from the front side of the instrument panel with four 4mm screws in a 57mm panel cut-out.
- For installation details and drawings refer to chapter “6.8.3 Wiring Diagram”.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

6.6 Electrical Connections

The 15-pin D-Sub connector contains all electrical connections except the antenna.

	The battery plus connection must be protected with at least 3-amps slow blow fuse!
---	--

6.6.1 Microphone-Connection

Both the L (left) and R (right) microphone input channels can either be connected to standard microphones (standard signal level 1Vpp) or to dynamic microphones (standard signal level 5mV to 10mV). R has less sensitivity (30mV).

For standard microphones a supply voltage of 8V at 330 Ω is provided. Elementary Electret microphones can also be connected. They have considerably lower signal levels and therefore require an 8V supply voltage.

The microphone input channel amplifier gain can be selected via the MIC-Setup menu "4.4.11 MIC – Setup".


When dynamic microphones are used in gliders the 8V supply voltage is switched off for power saving purposes. Also if R-input is not used it should be loaded or grounded and not be connected to open wires.

Standard microphones normally used in headsets together with dynamic microphones generally cannot be used at the same time, just alternatively. Motor gliders should have a toggle switch installed to differentiate between motor less flight with dynamic microphones and powered flight with headsets.

When the AUTO mode is selected in the MIC-Setup menu the KRT2 automatically recognizes on MIC-L (pin 3) which microphone type has been switched and acts accordingly.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

Both inputs must not be wired together. L is the master.

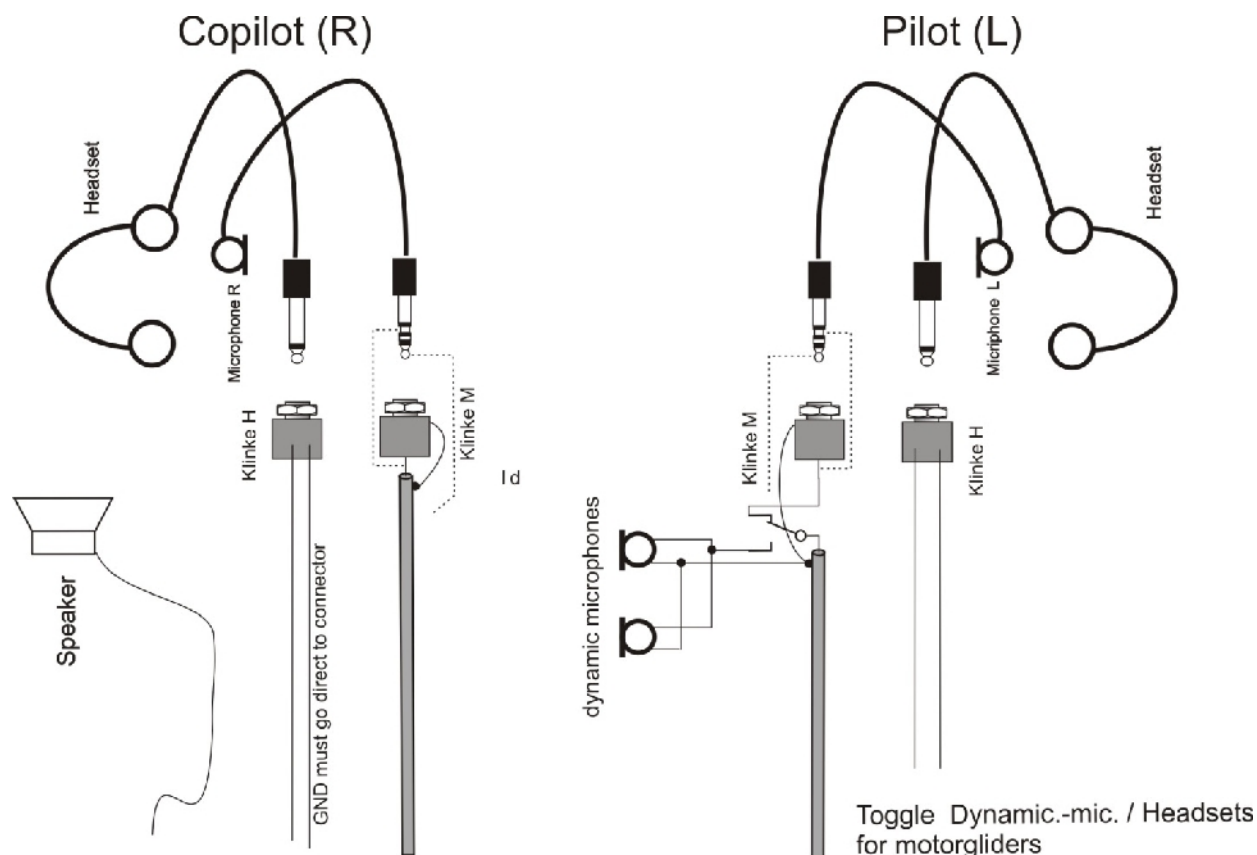

Because the 8V supply voltage is switched off when dynamic microphones are used during glider flight the second (co-pilot) headset microphone is disabled.

A maximum of two microphones of same type may be connected to each microphone input channel.

6.6.2 Speaker & open microphone:

An open microphone together with a speaker and intercom is not possible. Running a speaker together with an open microphone (goose neck) the Intercom operation has to be turned off by setting VOX=10 or opening the intercom switch (indicating "e"), other vice a feedback from the speaker will occur.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

6.6.3 Earphone Connection

Several earphones of same type can be connected in parallel. The total impedance should not be less than 60 Ohms.

6.6.4 External Audio Input

Audio alarms can be made available via the external audio input. When this input is not used it must be connected to ground in order to avoid noise. PIN5 must be connected to Battery minus (GND).

6.6.5 Speaker Connection

The high output power for the speaker requires a differential interconnection.

This does not allow that one side of the speaker wires is grounded. Both the wires have to be installed fully insulated.

Special intention has to be paid at gliders after retrofitting on older installations. Check with a meter the resistance between one speaker wire and the case of KRT-2 for high impedance.

After turn on it will appear this warning on the screen in case the speaker is grounded.



Running under that condition may cause a defect.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

6.7 Finally Audio-Setup

This is an overview for a correct audio set up depending on the usage.
Ground the unused MIC.-R input if unused.

6.7.1 For gliders

Press button AUD 3x for VOX: Set to VOX 10 (turn off) or open the intercom switch (indicating “e”).

Press button AUD 4x for TXm: Set to TXm**.

Press button AUD 6x for EXT: Set to EXT 00 (turn off).

For dynamic Microphones:

Press button AUD 10x for MIC: Set to MIC-L to Level 11.

Press button AUD 8x for SITxx: Set to SIT01 (turn to min.).

For Electret Microphones:

Press button AUD 10x for MIC: Set to MIC-L to a level (3 to 10) so that indication is just exceeding ½ of the maximum.

Leave the menu in position “L” (not AUTO).

6.7.2 For motor gliders dual seaters

For change mode (motoring & headset – gliding & dynamic microphone)

Press button AUD 3x for VOX: Set to VOX 3.

on condition for motoring.

Press button AUD 4x for TXm: Set to TXm**.

Press button AUD 6x for EXT: Set to EXT 00 (turn off),
or on condition.

Press button AUD 10x for MIC: Set MIC-L to level 5 or as required,
Set MC-R as required or to 1 if unused.
Select AUTO and leave menu.

6.7.3 For Motor planes

Press button AUD 3x for VOX: Set to VOX 3 (turn off).

Press button AUD 4x for TXm: Set to TXm**, or on condition.

Press button AUD 6x for EXT: Set to EXT 00 (turn off), or on condition.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

Press button AUD 10x for MIC: Set to MIC-Level 3 or as required
Set MC-R as required or to 1 if unused.
Leave the menu in position “L” (not AUTO).

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

6.8 Wiring


6.8.1 Wire Gauges

Supply lines (Power, GND): AWG18 (0,83 mm²)

Control lines: AWG22 (0,38 mm²)

All wires must be aviation certified.


6.8.2 Connector Pin-Configuration

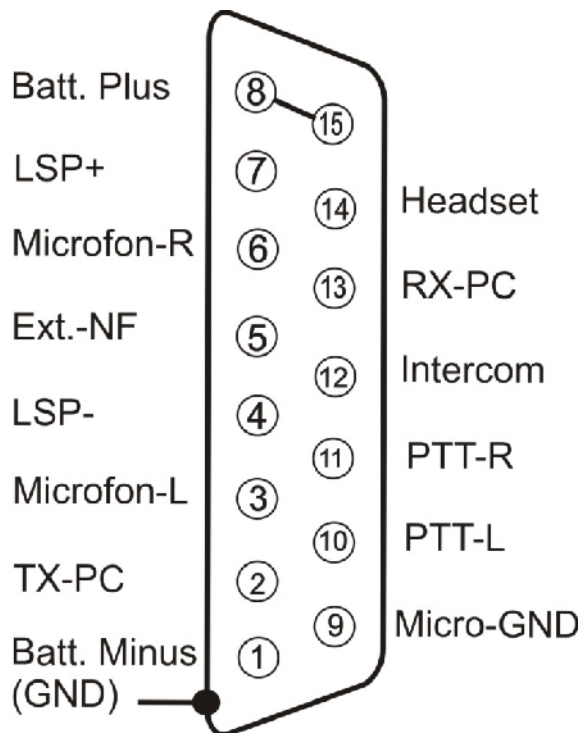

If manual intercom is not used, pin 12 should be grounded.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	

6.8.3.2 Glider two place connection

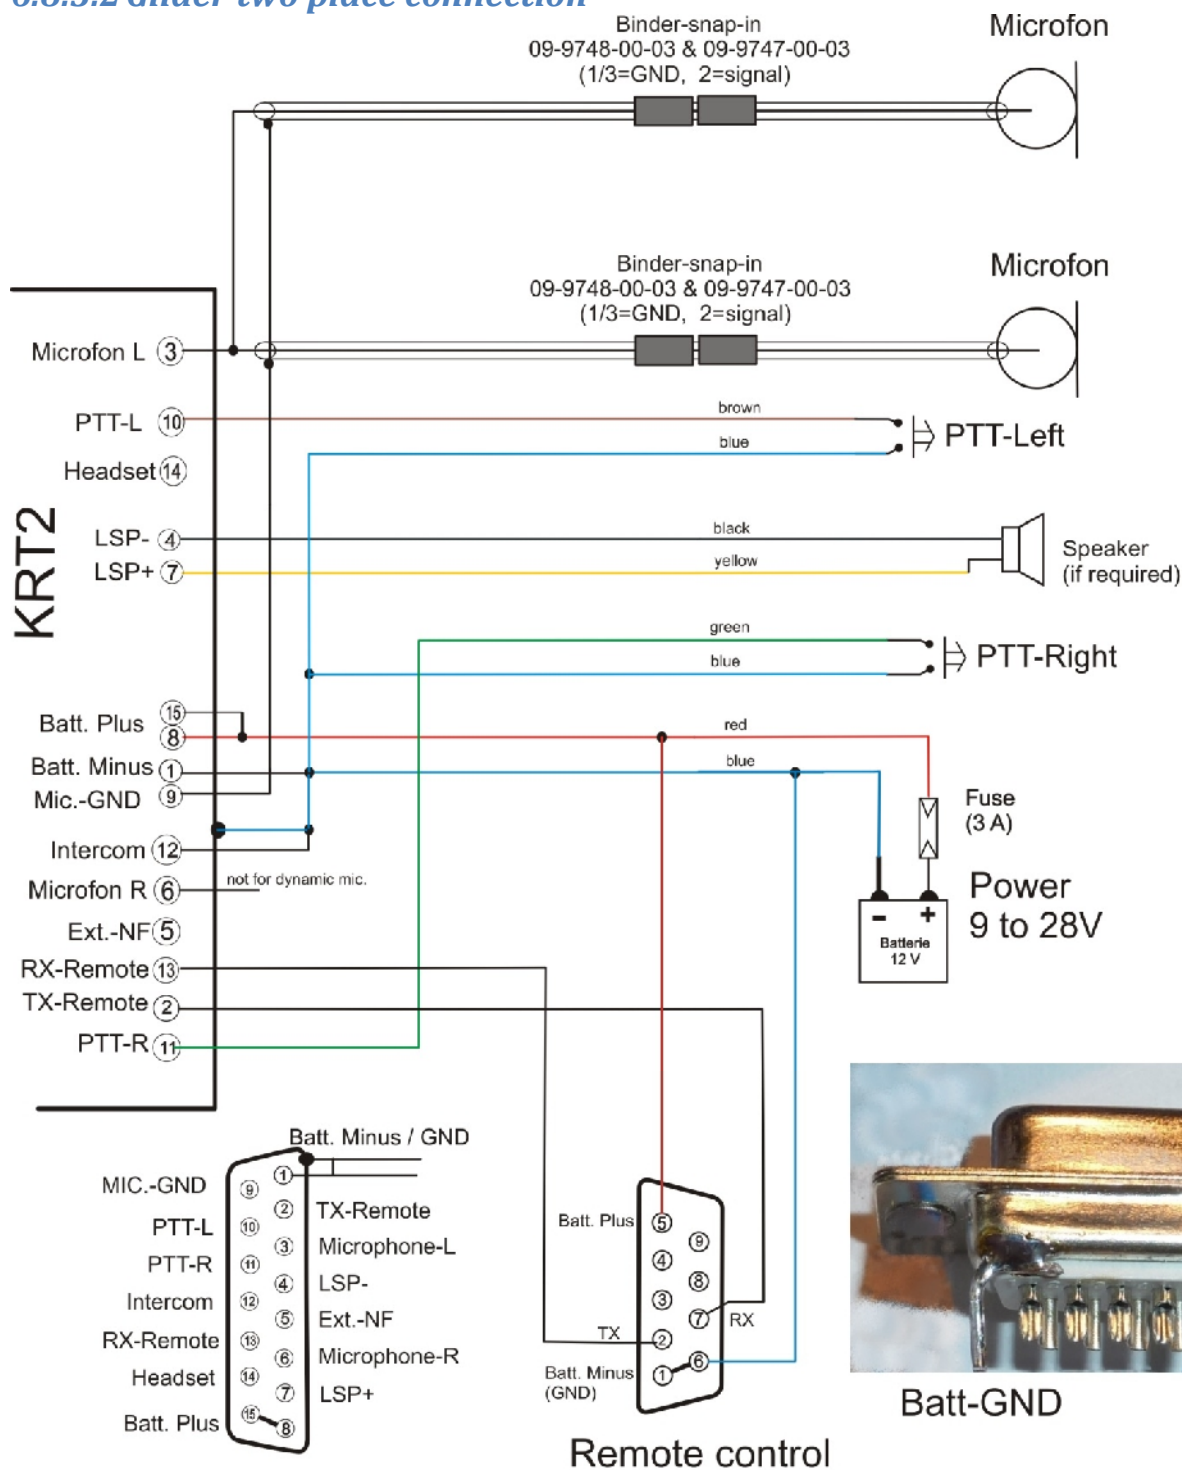


KRT-2 Glider-Dual
V3d

Microphone-Setup: leave in L = 11, (not AUTO)

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

6.8.3.3 Glider single

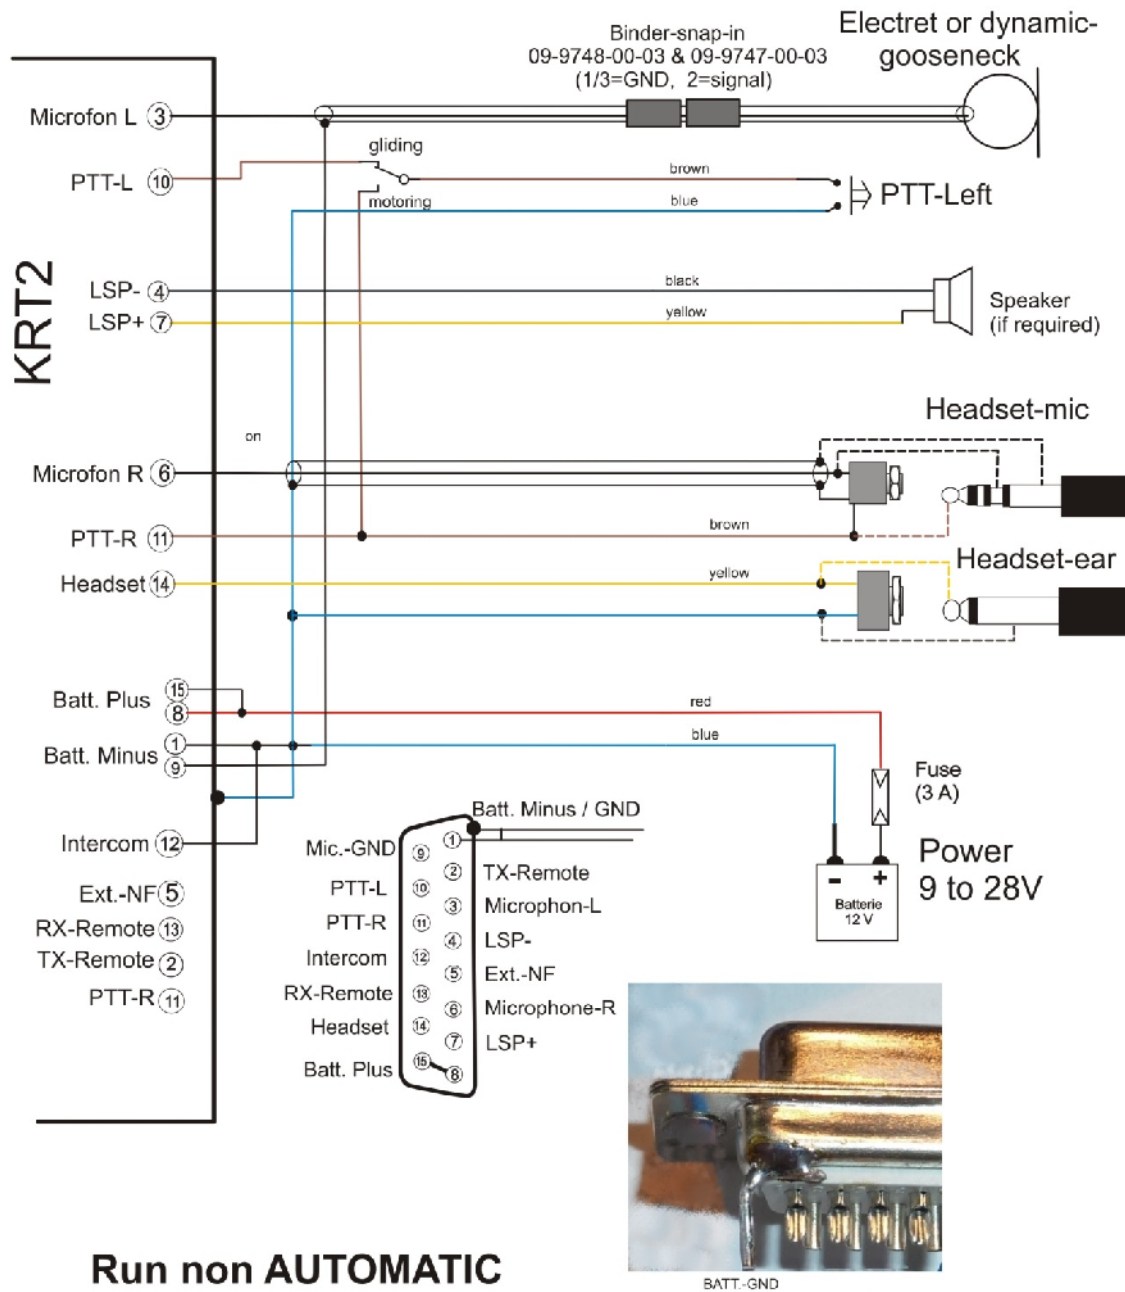


KRT-2 Motorglider-Single
PTT-Select.

Microphone-Setup: leave with L = 11 for dynamic, (not AUTO)

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	

6.8.3.4 Motor glider single

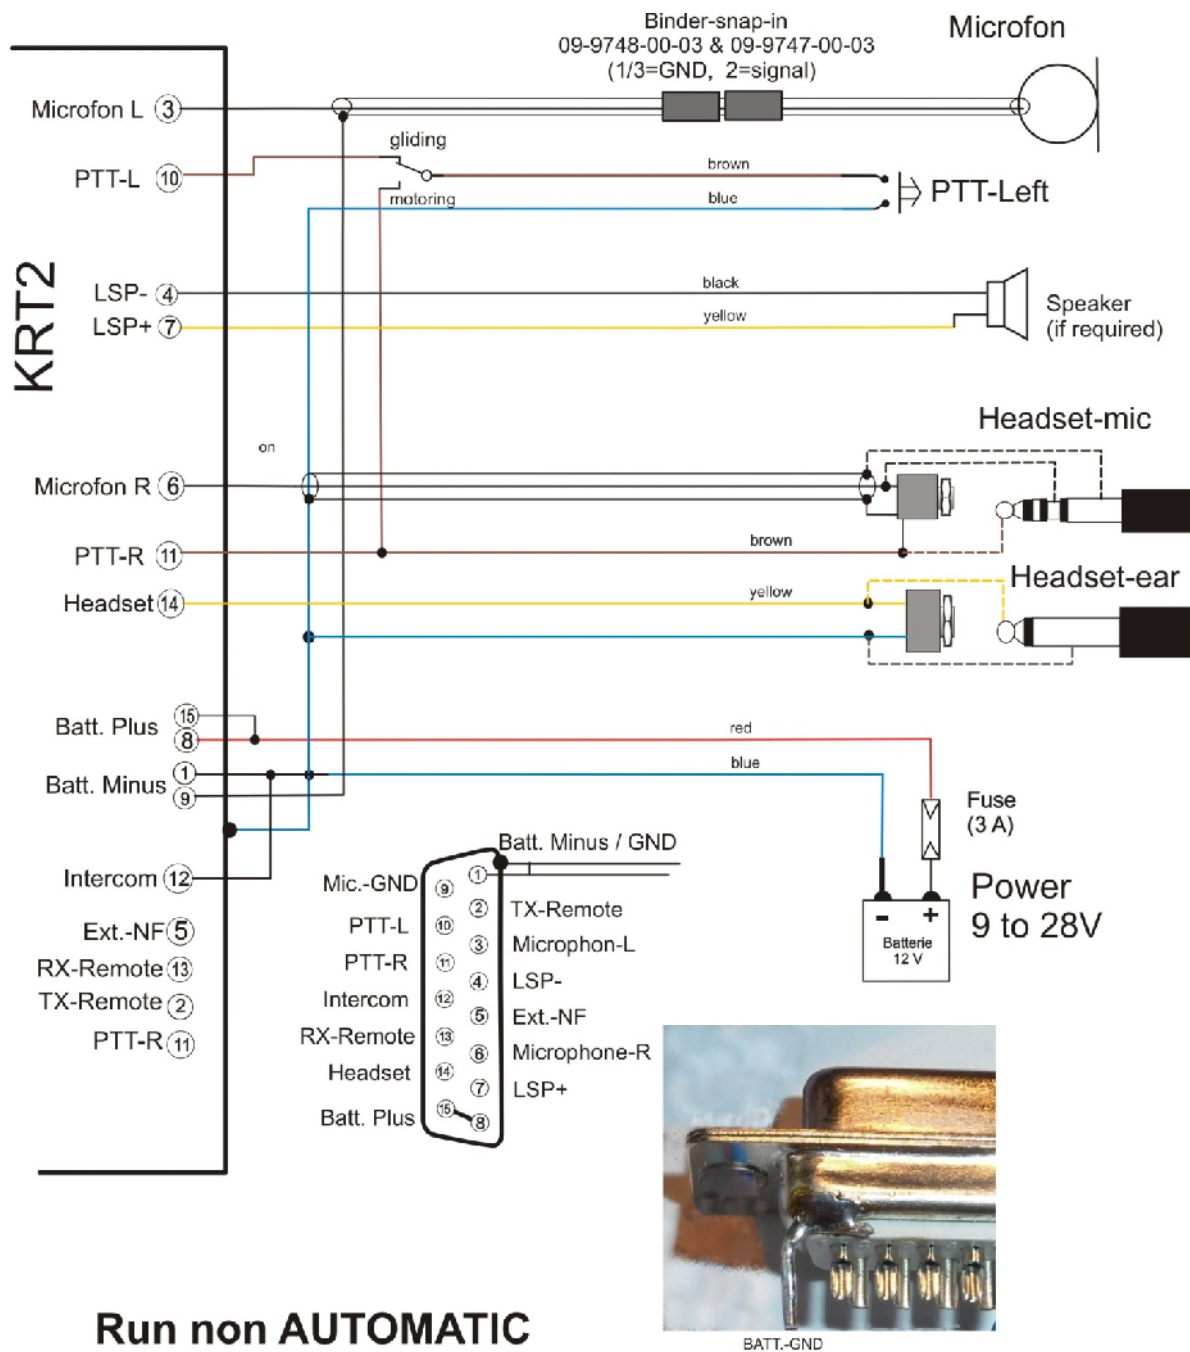


KRT-2 Motorglider-Single
PTT-Select.

Microphone-Setup: set L / R as required for headset, leave not in AUTO-mode.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

6.8.3.5 Motor glider dual


Dynamic Mikrophon

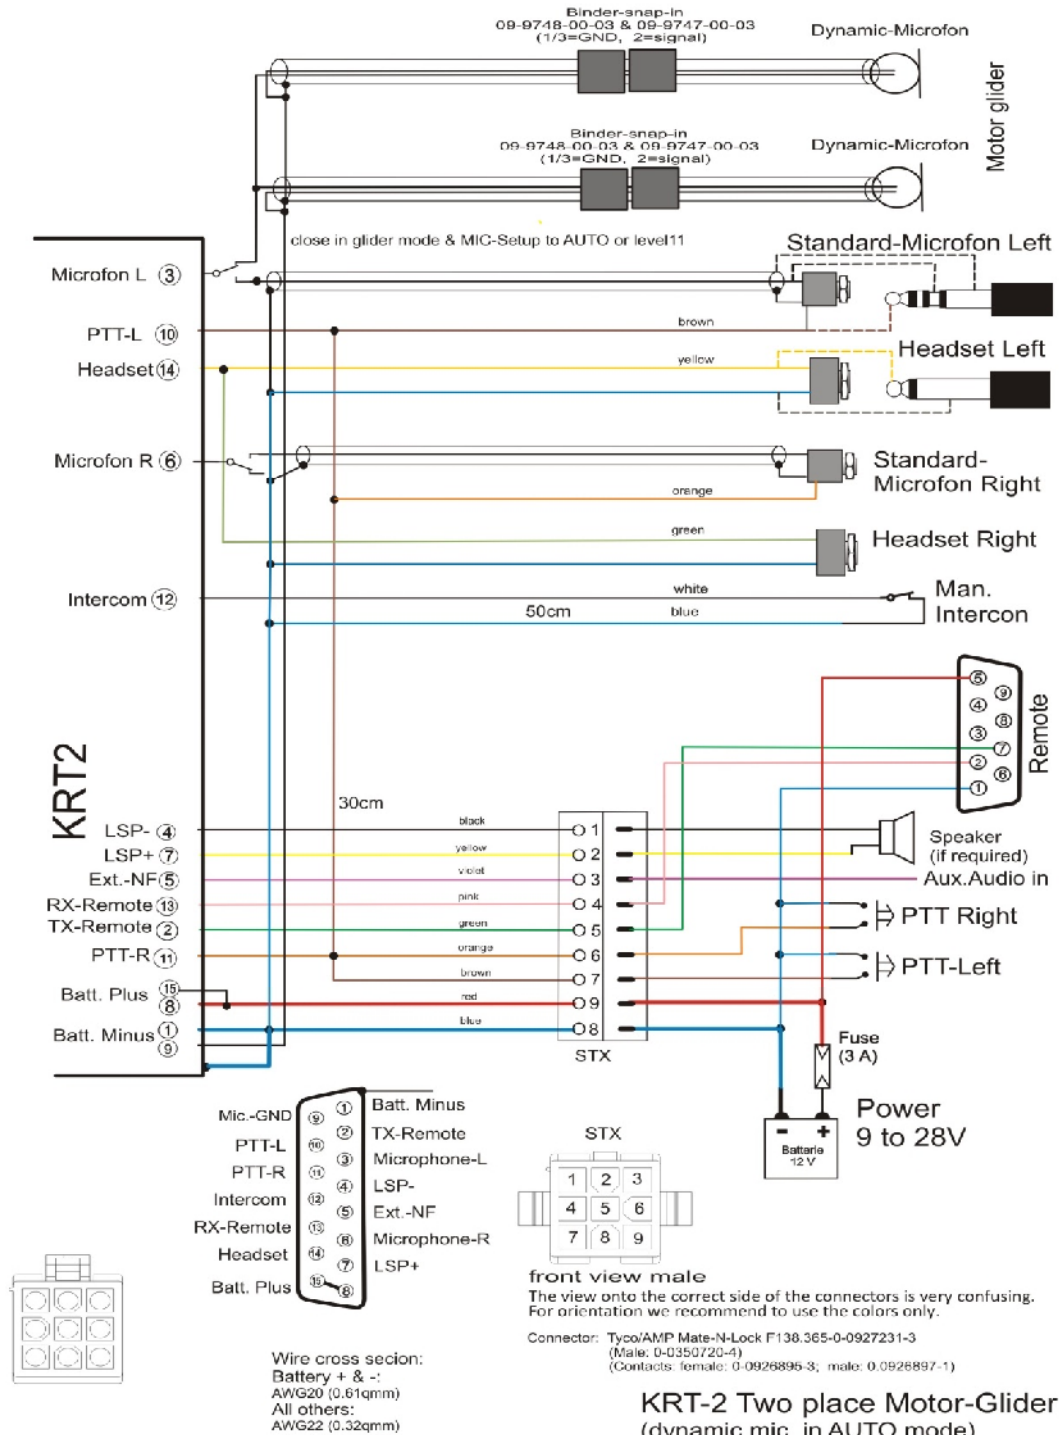

Microphone-Setup: R for headsets, leave menu in AUTO mode.

	User & Installation manual VHF- Communication Transceiver KRT2	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
---	---	---

Electret Mikrophon

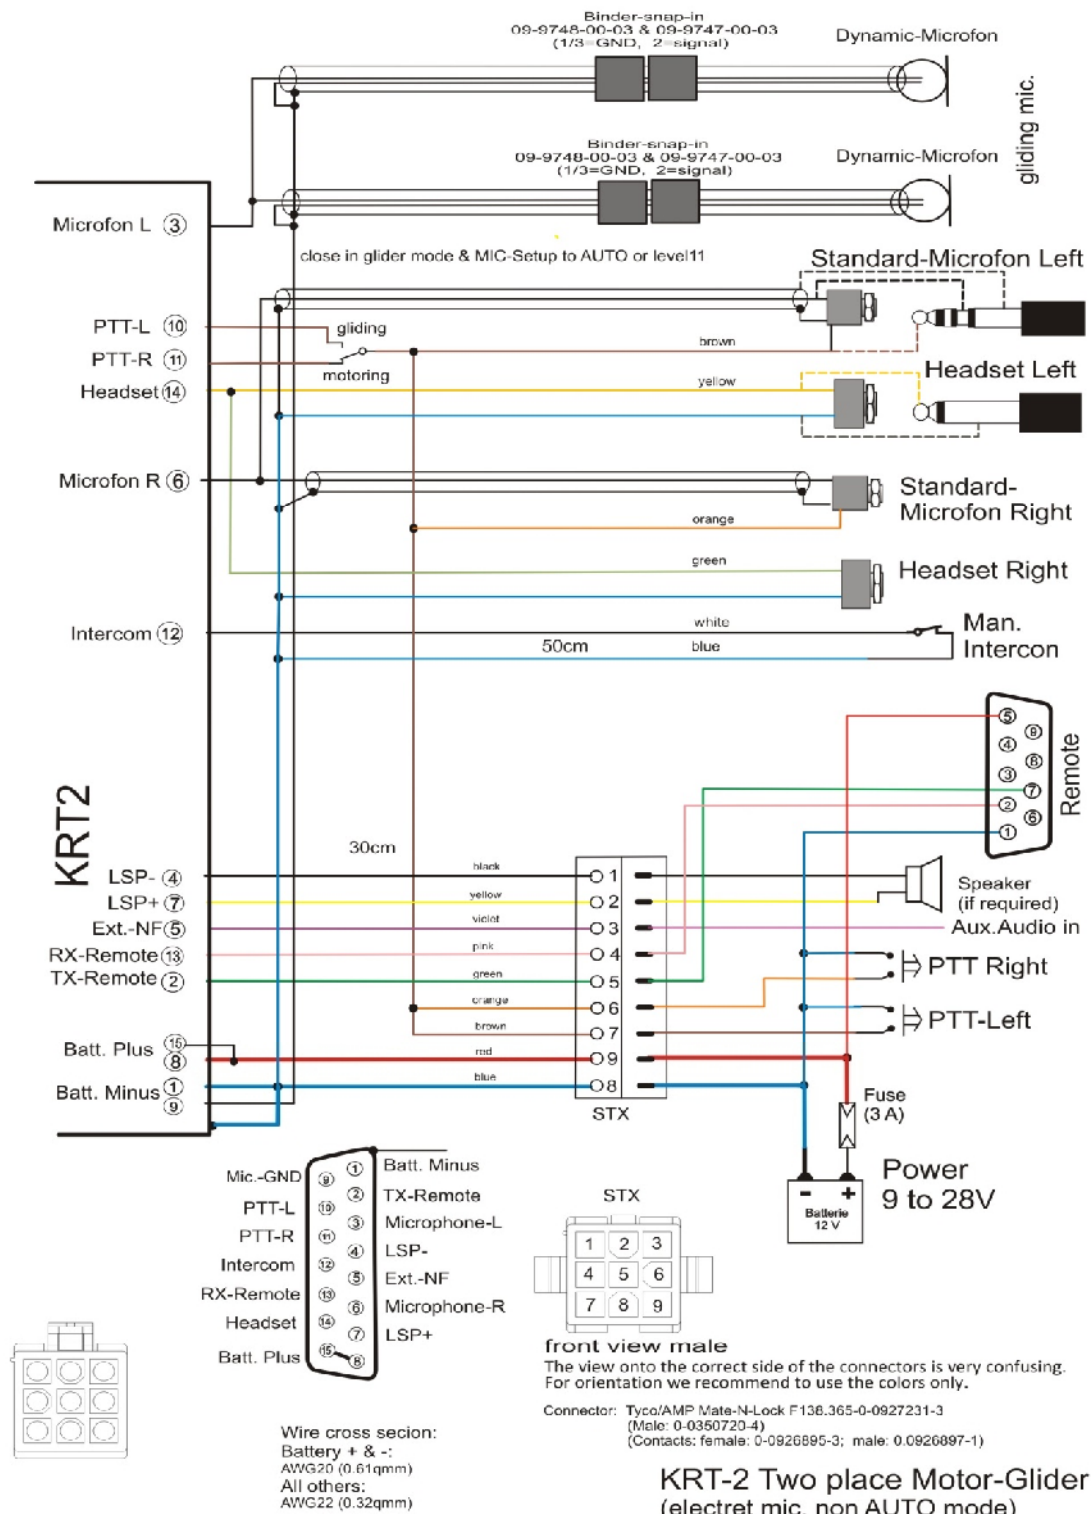

Microphone-Setup: leave L = 3..9 (in case of dynamic =11),
R=3 (not AUTO-mode).

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	

6.8.4 Wiring for dynamic microphones

Special attention is required for the wiring for dynamic microphones. Because of the required high gain any mistake on the ground wiring leads to interferences and feed backs.

The basic rules are:


Never join power current grounds with the microphone ground.

The cleanest GND is the case of the radio.

Put the battery-GND to the case and pin 1 and the microphone-GND to the pin 9 only.

6.8.5 Connection support

In order to connect shields of all cables at a single point and to avoid ground loops an adapter board as shown is recommended.

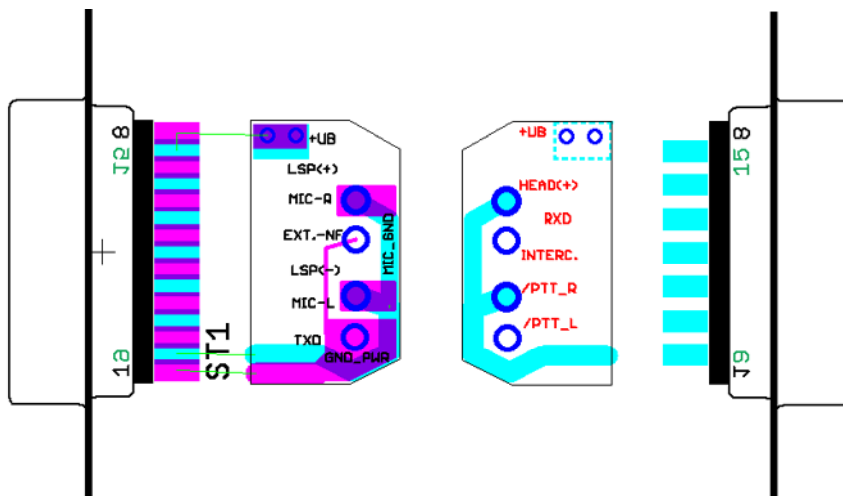

The adapter board is placed between the connector pin rows and soldered to the BAT plus pins 8,15 and GND pins 1 and frame.

Pin 9 (microphone-GND) is provided on two pads for shielding.

Further information printed on the board serves to connect all cables to its corresponding pins.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015


6.9 Antenna

6.9.1 Antenna Selection

- A 50 Ohms impedance VHF-COM-antenna is required.
- The antenna must be approved in respect to aircraft type and installation location.
- The antenna specifications can only be fulfilled when properly installed

6.9.2 Installation Recommendation

- The manufactures instructions have to be observed.
- The metallic contact between airplane surface and antenna ground must be very good. Non-metallic airplanes must have installed a metal sheet, foil or mesh of at least 80×80 cm inside the fuselage as electric counterweight..
- In order to avoid interference the distance between a COM an NAV antenna or between a COM and another COM antenna should be as large as possible. A distance of 2 meters normally is sufficient.
- The antenna must be installed vertically and as far as possible away from parts like propeller, landing-gear, rudder etc., that may influence propagation of the radio signals.
- In gliders the internal antenna provided by the airplane manufacturer is to be used.

	<p>The RF-antenna cable may not be part of other cable sets like power-supply or microphone.</p> <p>It must not be placed together with any other COM, NAV or transponder antenna cable.</p> <p>THIS IS MOST IMPORTANT</p>
---	---

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

6.10 Microphone general

The correct setting of the MIC and VOX values is of great importance for the Intercom system (see 4.4.3. VOX Intercom Voice Trigger Level and 4.4.11. MIC Setup).

The VOX intercom voice trigger level must be set to such a value that the intercom system is activated when speaking at a normal voice level into the microphone. It should be set so that it is not triggered by normal cockpit noise.

If there is extreme cockpit noise or there are uncompensated microphones VOX should be activated with VOX=01 permanently and enable/disable by a manual intercom switch.

The manual intercom operation is possible with one or two separate, parallel connected, optional intercom switches. These switches are not the PTT switches. The intercom switches connect pin12 (intercom) with GND (pin1).

The intercom-deactivation will be indicated with “e” if pin12 is not on GND.

Communication with the VOX system requires pin 12 to be connected to GND by means of one or two intercom switches.

The KRT2 unit transmits only when a PTT switch is pressed.

Cockpit noise suppression is only possible with differential microphones used in modern headsets. Normal Electret microphones are not suitable.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

6.11 Post-Installation Check



A certified maintenance shop must verify the proper operation of the VHF transceiver or as required by national regulations.

A complete check of all airplane systems is required to certify that the new wiring is not causing any malfunction.

The standing wave ratio (SWR) must be less than 3:1.

A test flight is recommended to verify proper transceiver operation.

The following items should be checked:

- Check transceiver operation with a radio station at least 50 km away when at 2000ft or above.
- Check if there is unusual electrical interference or noise.
- If possible check the transceiver operation on low and high frequencies of the VHF frequency band.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

6.12 Starting Up

Switch the unit on with the ON button.
The following display will appear:



The start display shows device type and the software number. It then changes into the normal operating mode (Direct Input).


6.13 Accessories

Suitable accessories such as antennas, cable sets, and switches can be purchased at our online shop on <http://www.dittel-avionik.de> or from other avionics suppliers.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015


6.14 Drawings

6.14.1 Dimensions

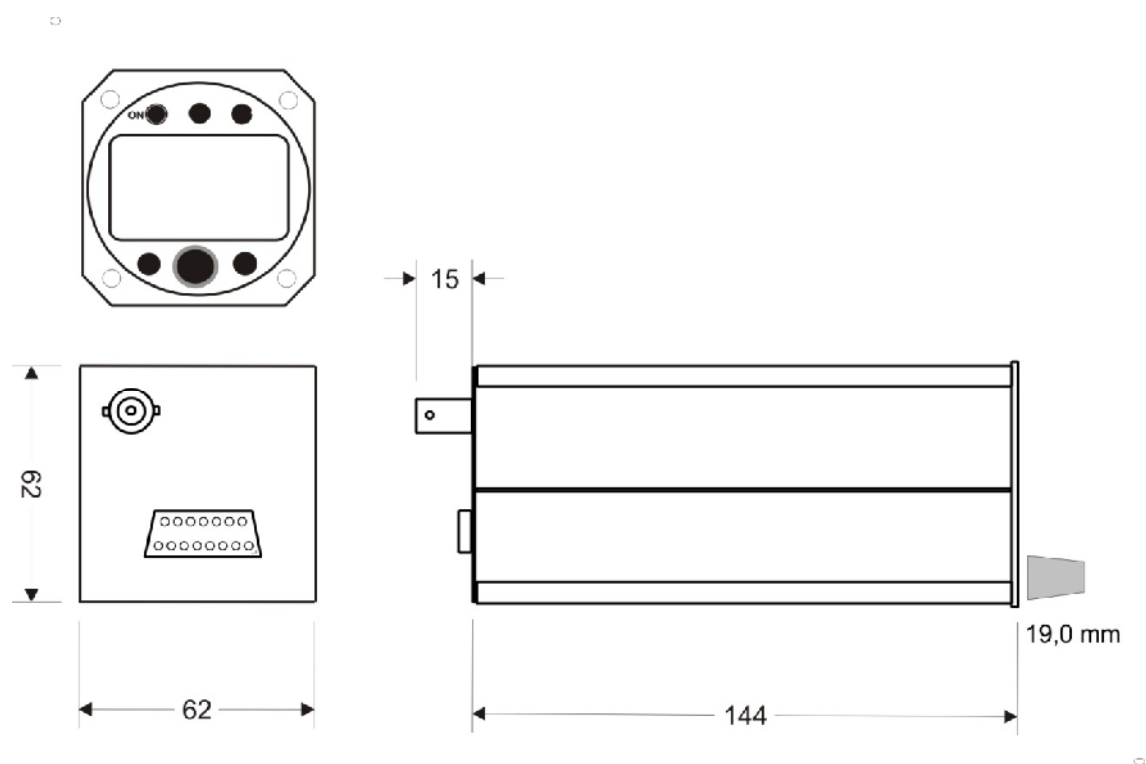


	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

6.14.2 Installation Directions

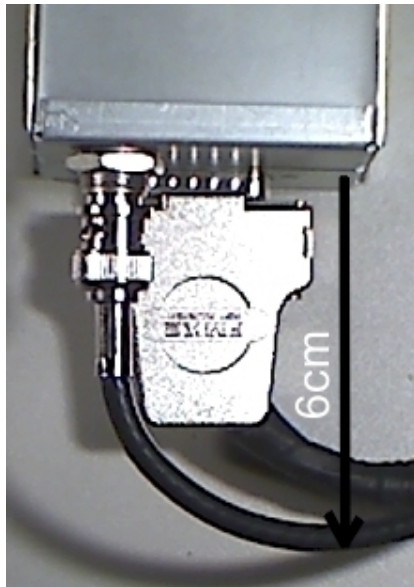

Connection Area

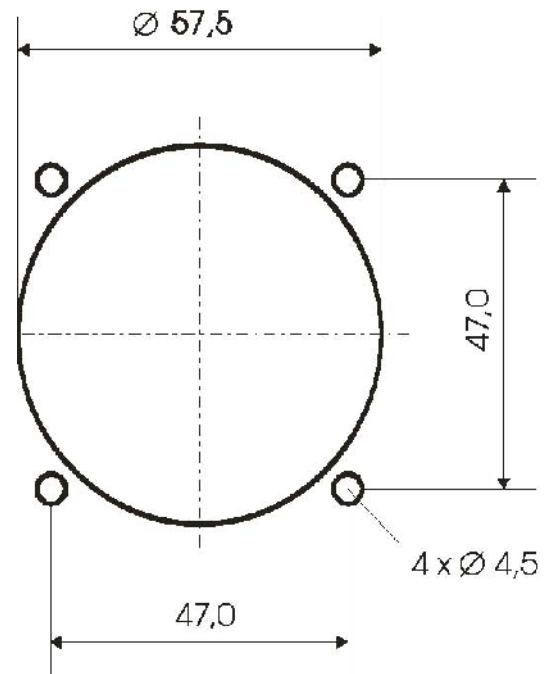

Panel Cut-out

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

7 Maintenance

7.1 Periodic Maintenance

No scheduled servicing tasks are required on the KRT-2 VHF unit.

7.2 Repair

Only exchange and flat repair of the equipment is permitted. In case of equipment failure, the unit must be sent to the manufacturer. Refer to section 1.3 Customer Service.

7.3 Cleaning

Clean the display only with, lint-free cloth and an eyeglass lens cleaner that is specified as safe for anti-reflective coatings.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e Revision 11.3 Aug. 2015
	KRT2	

8 ANNEX

8.1 Frequency / Channel- schedule

The following table contains the operating and displayed frequencies between 118.000 and... 118.100 MHz. The table can be continued up to 136.975 MHz following the same principle.

Operating frequency (MHz)	Channel Spacing (kHz)	Displayed channel 8.33/25 kHz Mode	Displayed Channel 25 kHz Mode
118.0000	25	118.000	118.000
118.0000	8.33	118.005	
118.0083	8.33	118.010	
118.0166	8.33	118.015	
118.0250	25	118.025	118.025
118.0250	8.33	118.030	
118.0333	8.33	118.035	
118.0416	8.33	118.040	
118.0500	25	118.050	118.050
118.0500	8.33	118.055	
118.0583	8.33	118.060	
118.0666	8.33	118.065	
118.0750	25	118.075	118.075
118.0750	8.33	118.080	
118.0833	8.33	118.085	
118.0916	8.33	118.090	
118.1000	25	118.100	118.100
118.1000	8.33	118.105	
etc.	etc.	etc.	etc.

	User & Installation manual VHF- Communication Transceiver	Doc.-Nr: DE-3000-800100e
	KRT2	Revision 11.3 Aug. 2015

TRANSMITTER	
POWER OUTPUT	6 W (nominal) @ >13.5V 4 W (minimal)
HARMONIC DISTORTION	<10 % at 70 % modulation
SIDETONE OUTPUT	>0,5W an 300 (head set output)
MICROPHONE INPUTS	2 x standard (50mV...2V) into 100 or 2 x dynamic
HARMONIC CONTENT	>60dBc
MODULATION FIDELITY	deviation <6 dB von 350...2500Hz
CARRIER NOISE LEVEL	>35dB at 70% Modulation index
UNWANTED FREQUENCY MODULATION	<1kHz at m=70% / 1kHz
DUTY CYCLE	2 minutes on, 4 minutes off; automatic turn-off after 2 minutes continuous transmitter operation
RECEIVER	
SENSITIVITY	-105 dBm (>6 dB S+N/N, m = 30 % / 1 kHz)
BANDWIDTH / 25 KHZ	-6-dB-bandwidth > ±8.0 kHz
BANDWIDTH / 8.33 KHZ	-6-dB-bandwidth > ±2.78 kHz
SELECTIVITY (channel spacing 25 KHZ)	-40-dB-bandwidth < ±17.0 kHz -60-dB-bandwidth < ±22.0 kHz
SELECTIVITY (channel spacing 8.33 KHZ)	-60-dB-bandwidth < ±7.37 kHz
SPEAKER OUTPUT	10 W into 4
AGC CHARACTERISTIC	Deviation of NF-output < 6 dB from 10 µV to 10 mV
SQUELCH	Automatic Squelch (adjustable)
SPURIOUS RESPONSES	> 80 dB
DISTORTION (350...2500Hz)	<25% at rated power (85% / -33dBm) <10% at 10dB below rated power (70% / -33dBm)